

REDUCER SHAFT BOX SEALING

Reducer Shaft Box Sealing-XUH-Series

XUH series sealing box is suitable for M and S series gearbox shaft seal.




XUH

Code

X U H J

Gear reducer
050= M43 M45 M47
060= S47
070= M49



CONNECTION SIZE

Code	ØC	ØD	ØF1	F2		ØG	E	H	L	kg	For
				Ø	Nº						
XUH035J4	35	58	68	5	4	76	37	-	-	0.3	M41-M43(ES0)
XUH050J4	50	90	134	9	5	155	57	2.5	118	0.5	S25-M43-M45-M47
XUH060J1	60	90	134	9	5	155	57	2.5	118	0.5	S47
XUH070J1	70	105	134	9	5	155	57	2	118	0.8	M49




SUH

Code

S U H

Gear reducer
050= RM 20 RM25
070= RM 30 RM35



CONNECTION SIZE

Code	ØC	ØD	ØF1	F2		ØG	E	H	L	kg	For
				Ø	Nº						
SUH050	50	90	134	9	4	155	57	2.5	118	0.5	RM 15 / RM 20 / RM 25
SUH060	60	90	134	9	4	155	57	2.5	118	0.5	
SUH070	70	105	134	9	4	155	57	2	118	0.8	RM 30 / RM 35

Dimensions in mm

SHAFT BOX SEALING

Air-blown sealing unit- XUC-Series

XUC series sealing box is suitable for shaft sealing of S series gearbox..



XUC



Code **U C 0 4 5** **B 1**

030	060
035	070
040	080
045	090
050	100
055	

Shaft diameter

G: air blown

Seal type

"": Standard (per TX)


C: with no threaded columns (for TFX)

Seal configuration

Seal body material

Seal features

1: cast iron
2: SS 304
3: SS 316
B: teflon plated packing gland seal
C: teflon plated packing gland seal
E: pre-grease felt seal for food applications

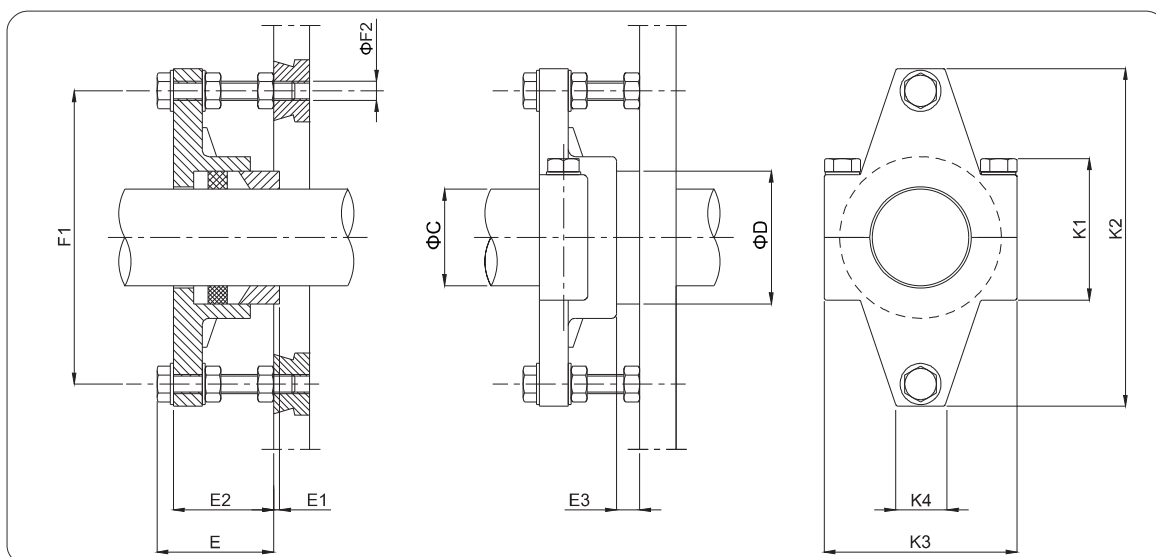

B = standard:graphitized -
C = teflonized -
D = fiberglass -

Code	Φ C	Φ D	E	E1	E2	E3	F1	Φ F2	K1	K2	K3	K4	kg	For
XUC030 . 1	030	45	48	2	28	12	99	M8	20	120	70	50	0.5	S21
XUC035 . 1	035	50	48	2	28	12	99	M8	20	120	70	50	0.65	XS.025
XUC040 . 1	040	55	48	2	28	12	121.6	M8	20	140	80	60	0.75	S23
XUC045 . 1	045	60	48	2	28	12	121.6	M8	20	140	80	60	0.8	XS.035
XUC050 . 1	050	70	60	3	36	14	141.4	M10	30	164	100	70	1.2	S25
XUC055 . 1	055	75	60	3	36	14	141.5	M10	30	164	100	70	1.5	XS.045
XUC060 . 1	060	80	60	3	36	14	183.4	M10	30	210	120	70	1.8	S27
XUC070 . 1	070	90	60	3	36	14	183.4	M10	30	210	120	70	2	XS.055
XUC080 . 1	080	100	62	3	36	14	210.7	M12	35	240	140	70	2.5	XS.065
XUC100 . 1	100	120	80	3	36	18	210.7	M12	40	244	155	80	3	XS.080
XUC115 . 1	115	140	85	4	50	18	219	M16	45	344	180	110	6.5	XS.100

Dimensions in mm