

BULK SOLIDS HANDLING EQUIPMENT

SCREW CONVEYOR ACCESSORIES

Inspection hatch-XKA-Series

The inspection chamber is located under the first inlet pipe and under each intermediate suspension shaft. Used to facilitate maintenance of the intermediate hanging shaft.






Performance & Technical Features - Benefits

- Suitable for 168/219/273/323 screw conveyor
- With an elastic sealing strip
- With a fixed link

Code

X	K	A	2	1	9	S
Ø Feeder						
Ø168 Ø 273						
Ø219 Ø 323						

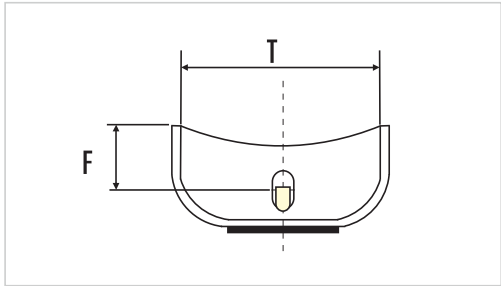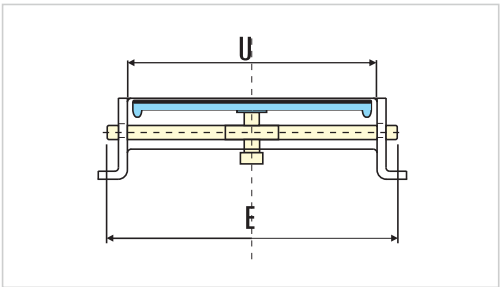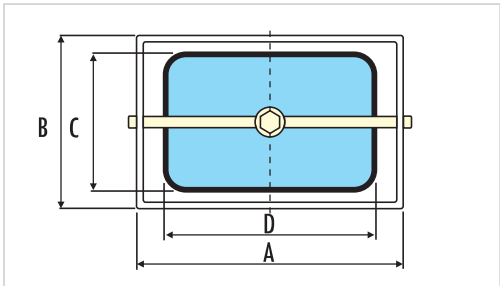

CONNECTION SIZE

Code	ØFeeder	A	B	C	D	E	F	T	U	Kg
XKA168S	168	274	150	144	265	300	71.0		267	3.5
XKA193S	193									3.5
XKA219S	219		187	180				181		3.5
XKA273S	273		212	205				206		3.5
XKA323S	323		236	230				230		3.5

Dimensions in mm