

BULK SOLIDS HANDLING EQUIPMENT

PINCH VALVE CONTROL COMPONENTS

Pinch Valve Control Panel-VMX Series

VMX control system for controlling the VM pinch valve open or closed.



OPERATING CONDITIONS

- Ambient temperature inside casing: -20 to 70° C



OPTIONS & ACCESSORIES

- Solenoid Coils: 24-48-110-220 V DC & 50 Hz AC

How To Order

VMX	01	N	A	EX
Type	Series	Coil	Voltage	Protection class
VMX	blank= no box 01=box-type	N=Wireless circle	Blank= 24V AC 50-60Hz A=24V DC B=110V AC 50-60Hz D=220V AC 50-60Hz	Blank= Standard EX=Explosion proof

PINCH VALVE CONTROL COMPONENTS

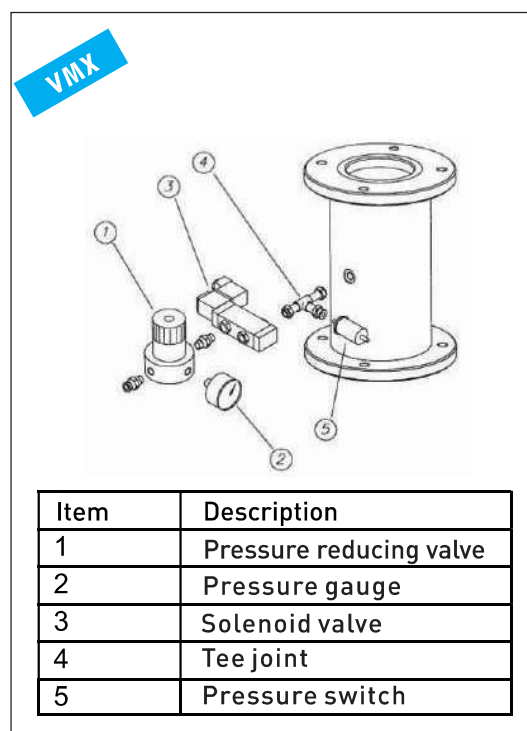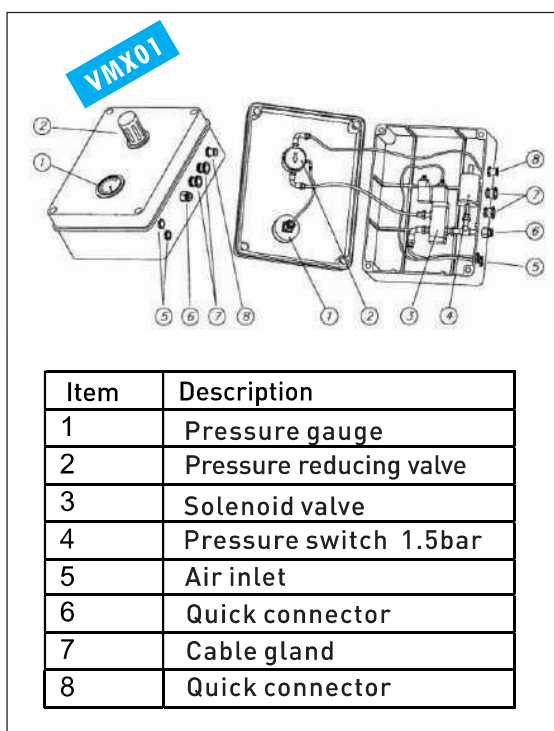

Part #	Operating pressure	Mains voltage	Temperature	Connection terminal	Ø Hose	Installed load	Protection level	Weight
VMX01	3.5Bar	12-24-48	-10...+50°C	3 x max. 1.5 mm ²	8X6	6VA (6W)	IP55	1.90
VMX		110-220 AC/DC						

Dimensions in mm